

OWNERS MANUAL

ENGINEERED WITH THIN PLATE PURE LEAD (TPPL) TECHNOLOGY

EXTREME POWER AND ENDURANCE



ODYSSEY[®] BATTERY



www.odysseybattery.com

INTRODUCTION

The ODYSSEY® battery ingeniously uses Absorbed Glass Mat (AGM) technology to offer, in one box, the characteristics of two separate batteries. It can deep cycle as well as provide enormous cranking power – it is almost as if a champion long distance runner and a world class sprinter are one and the same person.

These batteries are capable of providing engine cranking pulses in excess of 2250A for five seconds as well as 400 charge/discharge cycles to 80% depth of discharge (DOD). A typical starting, lighting and ignition (SLI) battery can do one or the other, but not both. It is either a sprinter or a long distance runner; ODYSSEY batteries will do both – provide short duration high amperage pulse or low rate long duration drains.

In order to achieve the full design cycle life of ODYSSEY batteries in cyclic applications the charge current must be a **minimum of 40% of the battery's 10-hour rating (column 8 of the chart on page 7)**. Thus the minimum charge current for a PC925 battery in a cycling application is 10.8 amps (40% of 27Ah). Please refer to Figure 6 of the ODYSSEY battery Technical Manual for a detailed discussion of the recommended charge profile for ODYSSEY batteries in cycling applications, and refer to Table 5 for suggested charge times. The manual may be downloaded from www.odysseybattery.com.

WHY USE ODYSSEY® BATTERIES?

GUARANTEED LONGER SERVICE LIFE

With an eight to twelve year design life (float) and a three to ten year service life, ODYSSEY batteries save you time and money because you do not have to replace the battery as often. ODYSSEY batteries are warranted against factory defects for two (2) years for powersports and Auxiliary Power Unit (APU) applications; three (3) years in automotive, marine, commercial and industrial applications and; four (4) years in the case of the PC1220, 75-PC1230, 75/86-PC1230, 75/86-705, PC1350, 25-PC1400, 35-PC1400, 34-PC1500, 34-790, 34M-PC1500, 34M-790, 34R-PC1500, 34R-790, 34/78-PC1500, 48-720, 78-PC1500, 78-790, 65-PC1750, 65-760, 31-PC2150, 31-800, 31M-800 and PC2250 batteries. Since actual warranty can vary with your geographical location, please check with your ODYSSEY battery representative for the warranty specific to your application.

SUPERIOR CRANKING AND FAST CHARGE CAPABILITY

The five second cranking power of ODYSSEY batteries is double to triple that of equally sized conventional batteries, even when the temperature is as low as -40°F (-40°C). Also, with simple constant voltage charging (alternator or independent charger), there is no limitation on the inrush current, so the user is assured of fast charge recovery.

MOUNTING FLEXIBILITY

The ODYSSEY battery may be installed in any orientation (except inverted) without sacrificing any performance attributes. Acid spillage is avoided due to the fact that the electrolyte is fully absorbed in the AGM material, and is not free to spill as it is in traditional flooded batteries. The valve regulated design of the ODYSSEY battery eliminates the need for an acid vent tube; eliminating the fear of acid burns or damage to expensive chrome or paint.

SUPERIOR VIBRATION RESISTANCE

ODYSSEY® batteries have endured rigorous tests that demonstrate their overall ruggedness and exceptional tolerance of mechanical abuse.

READY OUT OF THE BOX

ODYSSEY batteries are shipped fully charged. If the ODYSSEY battery's voltage is 12.65V or greater, simply install the battery in your vehicle and you are ready to go! If below 12.65V, boost charge following the instructions in the ODYSSEY battery Owner's Manual and/or Technical Manual. Putting a boost on the battery will not damage it, even if its voltage reads higher than 12.65V.

WORRY-FREE SHIPPING

Owing to the drycell design, the US Department of Transportation (USDOT) has classified the ODYSSEY battery as a nonspillable, so it may be shipped worry-free by express service or by air. Please see our MSDS for complete details at www.odysseybattery.com.

LONGER STORAGE LIFE

Unlike conventional batteries that require a recharge every six to twelve weeks, the ODYSSEY battery can be stored for up to two years at 77°F (25°C) from a fully charged state. These batteries can be stored for two years or when the open circuit voltage (OCV) drops to 12.00V, whichever comes first.

DEEP DISCHARGE RECOVERY

Should the ODYSSEY battery become deeply discharged, simply recharge following instructions in this manual.

INSTALLATION

Your ODYSSEY battery is normally ready to install right out of the box! Measure the battery voltage; if it is 12.65V or greater, install; if less, then refer to the charging section.

ANY OF THE FOLLOWING WILL VOID THE WARRANTY ON YOUR ODYSSEY® BATTERY:

- **REMOVING THE LABELED COVER**
- **REMOVING OR DESTROYING THE BATTERY'S DATE CODE**


ODYSSEY EXTREME SERIES™ BATTERY WARNING – DO NOT USE ANY TYPE OF OIL, ORGANIC SOLVENT, ALCOHOL, DETERGENT, STRONG ACIDS, STRONG ALKALIS, PETROLEUM-BASED SOLVENT OR AMMONIA SOLUTION TO CLEAN THE BATTERY COVERS AND BATTERY TOPS. THESE MATERIALS MAY CAUSE PERMANENT DAMAGE TO THE BATTERY COVERS AND BATTERY TOPS AND WILL VOID THE WARRANTY

ODYSSEY PERFORMANCE SERIES™ BATTERY WARNING – PROLONGED EXPOSURE AND OR IMMERSION INTO ANY TYPE OF OIL, ORGANIC SOLVENT, ALCOHOL, DETERGENT, STRONG ACIDS, STRONG ALKALIS, PETROLEUM-BASED SOLVENT OR AMMONIA SOLUTION TO CLEAN THE BATTERY COVERS AND BATTERY TOPS MAY CAUSE PERMANENT DAMAGE TO THE BATTERY COVERS AND BATTERY TOPS AND WILL VOID THE WARRANTY.


DO NOT SHORT CIRCUIT YOUR ODYSSEY® BATTERY'S TERMINALS!
Remove any metallic items such as watches, bracelets and other personal jewelry to ensure safe installation.

For FAQs and troubleshooting, please refer to www.odysseybattery.com.

ODYSSEY® EXTREME SERIES™ BATTERIES

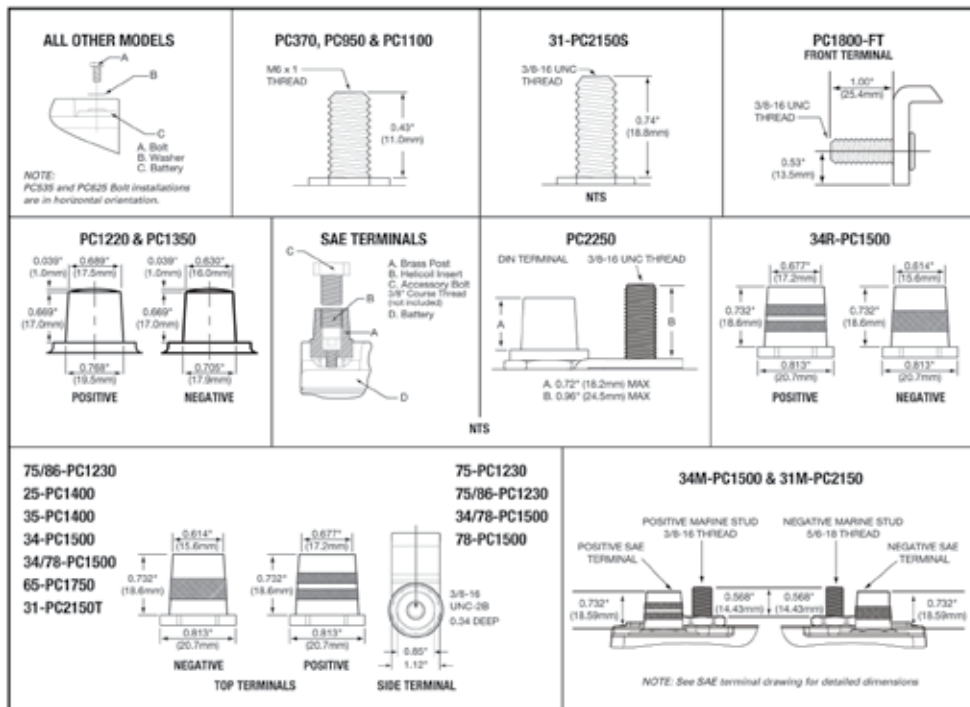

ODYSSEY® PERFORMANCE SERIES™ BATTERIES

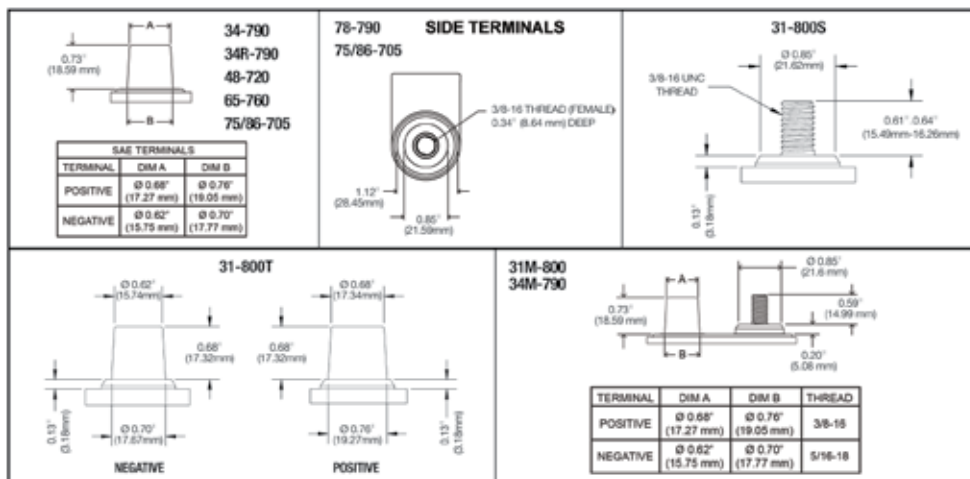

INSTALLATION

1. Using proper procedures as recommended by the vehicle manufacturer, carefully disconnect the cables from your old battery and remove it from the vehicle. Return the spent battery to the battery dealer for proper recycling.
2. Inspect existing battery cables for corrosion, acid damage or insulation deterioration. Replace if deterioration is present.
3. Position your ODYSSEY® battery in the battery holder and fasten firmly to the vehicle.
 - Optional height adapter may be used on the Group 34 models for installations where a group 24 or group 27 is required. Snap the adapter securely into place on the bottom of the battery. The Group 34 models with this adapter may be used to replace a group 24F or 27F.
4. Connect the positive cable from your ignition to the Positive (+) terminal.
5. Connect the negative cable from your engine or chassis to the Negative (-) terminal.
6. Torque the bolt, screw or nut per the specification noted in table. If you're using the Accessory Bolt (C), hold the Brass Post (A) with vise grips and counter torque. Do the same with General Motors® automotive battery cable installation.



NOTE: This is a valve regulated sealed battery and never needs to have water or electrolyte (acid) added. Warranty will be void if opened!

SPECIAL NOTICE!

- CUSTOM V-TWIN MOTORCYCLE INSTALLATIONS USING ODYSSEY PC535, PC545, PC545MJ, PC680MJ AND PC925LMJ BATTERIES

If your V-Twin motorcycle is equipped with a standard 32 amp single phase stator/alternator and you ride at a low engine rpm around town or even on long rides, the appropriate ODYSSEY battery may run out of charge due to low amperage output of the bike's stator at low rpms. After riding, turn the bike's engine off but leave the lights on for 30 seconds. Then, turn everything off and connect the ODYSSEY Ultimizer™ charger using the proper procedure as detailed in the ODYSSEY Ultimizer charger owner's manual.

- Prolonged storage of vehicles with fuel injection computers, alarms, GPS and other electrical devices that require continuous battery power to support active memories; this power drain must be offset with a maintenance-float charger, periodic charging or disconnecting the battery to prevent the establishment of irreversible crystallized sulphation in the battery plate oxide. Failure to address this destroys battery capacity and voids the warranty, as this is not a warranted defect in materials or workmanship.

ODYSSEY® BATTERY STORAGE AND DEEP DISCHARGE RECOVERY

Figure 1 shows the relationship between Open Circuit Voltage (OCV) and State of Charge (SOC) for the ODYSSEY® battery.

(A) How do I know the state of charge of the battery?

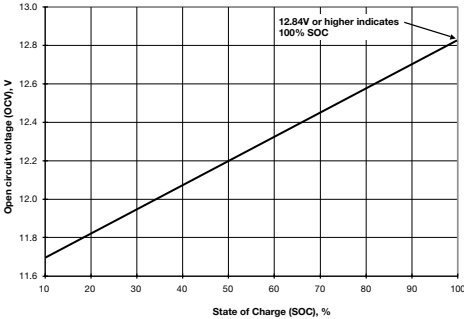


Figure 1: ODYSSEY® battery OCV vs. SOC

As long as the battery has not been charged or discharged for 6 or more hours, Figure 1 can be used to determine the SOC of the ODYSSEY battery. Use a high quality digital voltmeter to measure its OCV. The graph shows that a healthy, fully charged ODYSSEY battery will have an OCV of 12.84V or higher at 77°F (25°C).

(B) How long can the battery be stored?

ODYSSEY batteries should be fully charged prior to storage. Fully charged ODYSSEY batteries can be stored for up to 24 months at 77°F (25°C). Battery voltage naturally decreases with time and with increased temperature. The battery voltage should be checked periodically. If the battery voltage drops to 12.0 volts (35% state of charge) it should be recharged immediately to avoid permanent battery damage. The following can be used as a rough approximation for the potential storage times at different temperatures.

Storage Temperature	Storage Time (Months)
41°F (5°C)	48
59°F (15°C)	36
77°F (25°C)	24
95°F (35°C)	12
113°F (45°C)	6

Figure 2: ODYSSEY® battery storage time at temperatures

ODYSSEY® EXTREME SERIES™ BATTERIES

Model	Voltage	PHCA** (5 sec)	CCA*	HCA	MCA	Nominal Capacity		Reserve Capacity Minutes	Length inches (mm)	Width inches (mm)	Height inches (mm)	Weight lbs (kg)	Terminal	Torque Specs in-lbs (Nm- max)	Internal Resistance (m)	Short Circuit Current
						(20 Hr Rate-Ah)	(10 Hr Rate-Ah)									
PC310	12	310	100	200	155	8	7	9	5.43 (138.0)	3.39 (86.0)	3.90 (99.0)	5.9 (2.7)	M4 Receptacle	8.9 (1.0)	27.1	455A
PC370	12	425	200	315	270	15	14	25	7.9 (200.0)	3.0 (77.0)	5.5 (140.0)	12.5 (5.7)	M6 Stud	35 (3.9)	13.5	891A
PC535	12	535	200	300	265	14	13	21	6.70 (170.2)	3.90 (99.1)	6.24 (158.5)	12.0 (5.4)	M6 Receptacle	40 (4.5)	8	1000A
PC545	12	460	150	280	220	13	12	18	7.01 (178.1)	3.38 (85.9)	5.16 (131.1)	11.4 (5.2)	M6 Receptacle	50 (5.6)	10	1200A
PC625	12	540	220	400	330	18	17	26	6.70 (170.2)	3.90 (99.1)	6.95 (176.5)	13.2 (6.0)	M6 Receptacle	40 (4.5)	7	1800A
PC680	12	520	170	350	280	16	16	24	7.27 (184.7)	3.11 (79.0)	7.55 (191.8)	15.4 (7.0)	M6 Receptacle† or SAE 3/8-16" Receptacle	50 (5.6)	7	1800A
PC925	12	900	330	610	480	28	27	48	6.64 (168.7)	7.05 (179.1)	5.83 (148.1)	26.0 (11.8)	M6 Receptacle† or SAE 3/8-16" Receptacle	60 (6.8)	5	2400A
PC950	12	950	400	600	500	34	32	60	9.8 (250.0)	3.8 (97.0)	6.1 (156.0)	20.0 (9.0)	M6 Stud	35 (3.9)	7.1	1700A
PC1100	12	1100	500	800	650	45	43	87	9.8 (250.0)	3.8 (97.0)	8.1 (206.0)	27.5 (12.5)	M6 Stud	35 (3.9)	5.1	2450A
PC1200	12	1200	540	860	725	42	40	78	7.87 (199.5)	6.66 (169.1)	7.60 (193.0)	38.2 (17.4)	M6 Receptacle† or SAE 3/8-16" Receptacle	60 (6.8)	4.5	2600A
PC1220	12	1220	680	960	860	70	64.8	135	10.94 (278.0)	6.88 (175.0)	7.48 (190.0)	45.6 (20.7)	DIN Lead Post	N/A	5.7	2200A
75-PC1230	12	1230	760	1050	815	55	50	110	9.47 (240.5)	7.08 (179.8)	7.44 (189.0)	45.5 (20.6)	SIDE 3/8-16" Receptacle	60 (6.8)	2.5	3100A
75/86-PC1230	12	1230	760	1050	815	55	50	110	9.47 (240.5)	7.08 (179.8)	7.98 (202.7)	45.5 (20.6)	TOP SAE SIDE 3/8-16" Receptacle	60 (6.8) Side Terminal Only	2.5	3100A
PC1350	12	1350	850	1080	960	95	88.5	195	13.90 (353.0)	6.88 (175.0)	7.48 (190.0)	60.4 (27.4)	DIN Lead Post	N/A	4.2	2900A
25-PC1400	12	1400	850	1150	950	65	55	130	9.47 (240.5)	6.85 (174.0)	8.75 (222.3)	50.0 (22.7)	SAE	N/A	2.5	3100A
35-PC1400	12	1400	850	1150	950	65	55	130	9.47 (240.5)	6.85 (174.0)	8.75 (222.3)	50.0 (22.7)	SAE	N/A	2.5	3100A
34-PC1500	12	1500	850	1250	1050	68	62	135	10.86 (275.8)	6.77 (172.0)	7.98 (200.2)	49.5 (22.4)	SAE	N/A	2.5	3100A
34R-PC1500	12	1500	850	1250	1050	68	62	135	10.86 (275.8)	6.77 (172.0)	7.98 (200.2)	49.5 (22.4)	SAE	N/A	2.5	3100A
34M-PC1500	12	1500	850	1250	1050	68	62	135	10.86 (275.8)	6.77 (172.0)	7.95 (201.9)	49.5 (22.4)	SAE and 3/8-16" Stud (Pos.), 5/16-18" Stud (Neg.)	60 (6.8) Stud Only	2.5	3100A
34/78-PC1500	12	1500	850	1250	1050	68	62	135	10.86 (275.8)	7.08 (179.8)	7.88 (200.2)	49.5 (22.4)	TOP SAE SIDE 3/8-16" Receptacle	60 (6.8) Side Terminal Only	2.5	3100A
78-PC1500	12	1500	850	1250	1050	68	62	135	10.86 (275.8)	7.08 (179.8)	7.34 (186.4)	49.5 (22.4)	SIDE 3/8-16" Receptacle	60 (6.8)	2.5	3100A
PC1700	12	1550	810	1325	1175	68	65	142	13.03 (331.0)	6.63 (168.4)	7.78 (197.6)	60.9 (27.6)	M6 Receptacle† or SAE 3/8-16" Receptacle	60 (6.8)	3.5	3500A
65-PC1750	12	1750	950	1350	1070	74	65	145	11.84 (300.7)	7.19 (182.6)	7.49 (190.2)	58.0 (26.3)	SAE	N/A	2.0	5000A
PC1800-FT	12	1800	1300	1600	1450	214	190	475	22.87 (581.0)	4.92 (125.0)	12.46 (316.5)	132.3 (60.0)	3/8" Stud	80 (9.0)	3.3	3800A
31-PC2150	12	2150	1150	1545	1370	100	92	205	13.07 (332.0)	6.91 (175.5)	9.59 (243.6)	77.8 (35.3)	3/8-16" Stud or SAE†	200 (22.6) Max Stud Only	2.2	5000A
31M-PC2150	12	2150	1150	1545	1370	100	92	205	13.00 (330.2)	6.80 (172.7)	9.39 (238.5)	77.8 (35.3)	SAE and 3/8-16" Stud (Pos.), 5/16-18" Stud (Neg.)	200 (22.6) Max Stud Only	2.2	5000A
PC2250	12	2250	1225	1730	1550	126	114	240	11.26 (286.0)	10.59 (269.0)	9.17 (233.0)	86.0 (39.0)	SAE Terminal and 3/8-16" Stud	100 (11.0) For 3/8-16" Stud Only	2.1	5000A

*Cold Start Performance S.A.E. J537 JUNE 82 **Pulse Current † Can be fitted with brass automotive terminal. Optional metal jackets available on PC545, PC680, PC925, PC1200, PC1700 and 31-PC2150. Operating Temperature Range: PC310 and PC1800-FT: -40°F (-40°C) to 122°F (50°C), PC370, PC950 and PC1100: -40°F (-40°C) to 122°F (50°C), PC535 and PC625: -40°F (-40°C) to 113°F (45°C), PC545, PC680, PC925, PC1200 and PC1700 without metal jacket: -40°F (-40°C) to 113°F (45°C), PC545, PC680, PC925, PC1200 and PC1700 with metal jacket: -40°F (-40°C) to 176°F (80°C), PC1220, PC1350 and PC2250: -40°F (-40°C) to 104°F (40°C), All other models: -40°F (-40°C) to 176°F (80°C)

ODYSSEY® PERFORMANCE SERIES™ BATTERIES

Model	Voltage	PHCA** (5 sec)	CCA*	HCA	MCA	Nominal Capacity		Reserve Capacity Minutes	Length inches (mm)	Width inches (mm)	Height inches (mm)	Weight lbs (kg)	Terminal	Torque Specs in-lbs (Nm max)	Internal Resistance (m)	Short Circuit Current
						(20 Hr Rate-Ah)	(10 Hr Rate-Ah)									
75/86-705	12	1100	708	875	760	49	45	89	9.46 (240.3)	7.01 (178.1)	7.98 (202.7)	43.4 (19.7)	SAE, Side 3/8-16" Receptacle	60 (6.8) side only	2.8	2200
48-720	12	1250	723	950	842	69	63	130	10.91 (277.1)	6.89 (174.2)	7.5 (190.5)	48 (21.8)	SAE	N/A	2.8	2300
34-790	12	1500	792	1200	990	61	57	114	10.85 (275.6)	6.78 (172.2)	7.91 (200.9)	46.6 (21.1)	SAE	N/A	2.9	2400
34R-790	12	1500	792	1200	990	61	57	114	10.85 (275.6)	6.78 (172.2)	7.91 (200.9)	46.6 (21.1)	SAE	N/A	2.9	2400
34M-790	12	1500	792	1200	990	61	57	114	10.85 (275.6)	6.78 (172.2)	7.93 (201.4)	47.6 (21.6)	SAE and 3/8-16" Stud (Pos.), 5/16-18" Stud (Neg.)	60 (6.8) studs only	2.9	2400
78-790	12	1500	792	1200	990	61	57	114	10.85 (275.6)	7.00 (177.8)	7.4 (188.0)	47.1 (21.4)	Side 3/8-16" Receptacle	60 (6.8)	2.9	2400
65-760	12	1500	762	1200	891	64	59	129	11.86 (301.2)	7.19 (182.6)	7.38 (187.5)	49.8 (22.6)	SAE	N/A	2.3	2500
31-800	12	1600	802	1380	1188	99	94	188	13.0 (330.2)	6.79 (172.5)	9.42 (239.3)	69.0 (31.3)	SAE or 3/8-16" Stud	200 (200.6) studs only	2.6	2600
31M-800	12	1600	800	1380	1200	99	94	188	13.0 (330.2)	6.79 (172.5)	9.46 (240.3)	69.3 (31.4)	SAE and 3/8-16" Stud (Pos.), 5/16-18" Stud (Neg.)	60 (6.8) studs only	2.6	2600

*Cold Start Performance S.A.E. J537 June 82

** Pulse Current

Operating Temperature Range: 31-800: -40°F (-40°C) to 140°F (60°C).

MAINTENANCE

ODYSSEY® batteries are very different from standard liquid-acid batteries that are openly vented. The ODYSSEY battery is and operates as a sealed battery, recycling nearly all gases internally under normal operating conditions. There is no corrosion of the positive terminal or corrosion to the surrounding area. ODYSSEY batteries are shipped fully charged from the factory, but prior to installation, check the battery's voltage to see if it is 12.65V or greater. If not, recharge it using the procedure below.

Do not charge in an air tight compartment.

Never attempt to remove the top decal cover, as it will cause the battery to fail.

CHARGING

The state of charge in an ODYSSEY battery can be determined from the following chart:

Voltmeter Reading	State of Charge
12.84 Volts or higher	100%
12.50 Volts	75%
12.18 Volts	50%
11.88 Volts	25%


To get long life from the ODYSSEY® battery, it is important that the battery is kept near full charge, approximately 12.8V. If there are electrical loads during storage, then the negative battery cable should be disconnected or an independent float charger used. Low power 2.0 amp chargers for storage charge will keep a fully charged battery fully charged but cannot recharge if the ODYSSEY battery becomes discharged.

Racing Vehicles using total loss (no alternator) - standard automotive type chargers are not designed to return 105-108% of the energy removed. They normally boost charge to 80-95% and expect the alternator to complete the charge. EnerSys® approved chargers provide 105-108% recharge before switching to storage charge. The EnerSys approved chargers are listed on www.odysseybattery.com.

To fully charge a 31-PC2150 and 31-800 battery that is routinely discharged deeply, a minimum of 40 amps are required with charger voltage within the range of 14.1V to 14.7V. It is imperative not to exceed 15.0V as this will cause the pressure valves to open and out-gas hydrogen, oxygen and water from inside the battery. This will shorten the life of the battery and cause premature failure. Some portable chargers exceed 15.0V, especially two-wheel garage chargers, so charging voltages should be verified by measuring the charging voltage during the time when the charging amperage is reducing from full output. The deep cycle charging voltage must be within 14.1V minimum to 14.7V maximum.


If a standard automotive charger is used to boost charge a discharged battery because of an accessory left on, it is important to make sure the charging voltage does not exceed 15 volts during charge. A hand held voltmeter can be used to monitor this periodically.

12V PARALLEL CONNECTION

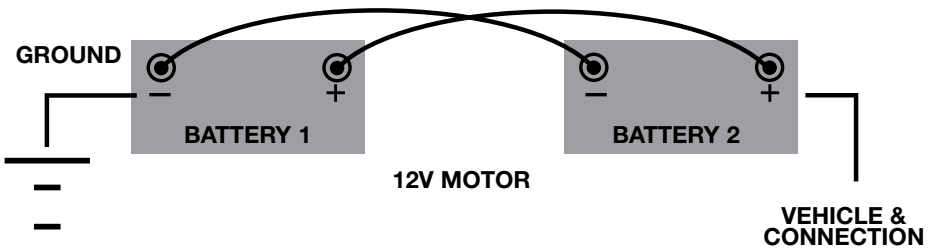


24V BATTERY CONNECTION

To power a 24V trolling motor, you will need to connect two ODYSSEY® batteries in series. As shown in the top illustration, the negative of Battery 1 is wired to the positive of Battery 2. Hook up the positive terminal of Battery 1 to the positive terminal of your trolling motor and the negative terminal of Battery 2 to the negative terminal of the trolling motor.

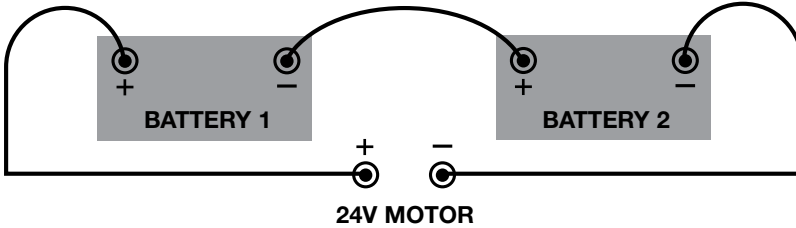

36V BATTERY CONNECTION

To power a 36V trolling motor, you will need to connect three ODYSSEY batteries in series. As shown in the bottom illustration, the negative of Battery 1 is wired to the positive of Battery 2; the negative of Battery 2 is then connected to the positive of Battery 3. Finally, hook up the positive terminal of Battery 1 to the positive terminal of your trolling motor and the negative terminal of Battery 3 to the negative terminal of the trolling motor.

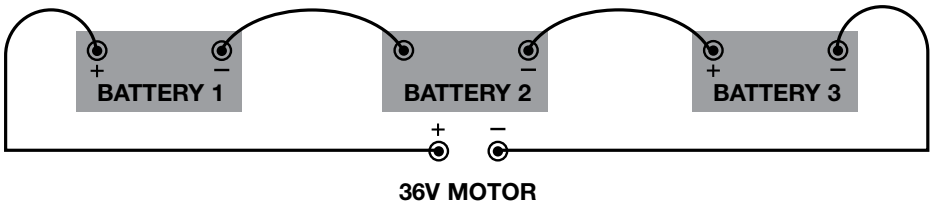

WINTER STORAGE

The ODYSSEY® battery does not lose its charged energy during cold storage temperatures, so there is no need to trickle or float charge during winter months. To store off-season, measure the battery voltage to make sure it is fully charged, 12.84 volts or greater; recharge if necessary. Disconnect the negative battery cable to prevent any applied electrical load during storage. The ODYSSEY battery cannot freeze down to -40°F (-40°C), so it can be left in the vehicle. It can be stored for 2 years or more below 77°F (25°C). Charging is required at 2 years or 12V, whichever comes first.

A 12V, 2 amp trickle charger can also be left connected to the battery if it is kept in storage for extended periods or if the battery is subject to parasitic loads during storage. The trickle charge voltage measured at the battery terminals must be between 13.5V and 13.8V. We recommend using the ODYSSEY Ultimizer™ charger for your battery. Additional information on ODYSSEY Ultimizer chargers, where to buy ODYSSEY chargers and ODYSSEY battery charging in general can be found on our website at www.odysseybattery.com.

WHAT IS COVERED BY THIS WARRANTY?

EnerSys Energy Products Inc. ("Manufacturer") warrants its ODYSSEY® batteries (hereafter referred to as "Battery") to be free of defects in material and workmanship for the following Applicable Warranty Periods:

- 2 years for Auxiliary Power Unit (APU) and other non-engine start cycling applications.
- 2 years for power sports applications.
- 3 years for commercial, industrial, marine and automotive applications in non-BCI sizes.
- 4 years for an engine starting application for PC1220, PC1350, PC2250 and all BCI sizes.

REGISTER YOUR ODYSSEY battery at: www.odysseybattery.com/registration

This warranty may vary from country to country; contact your authorized ODYSSEY Battery wholesaler or dealer for the applicable warranty.

WHEN DOES THE WARRANTY PERIOD BEGIN?

The Applicable Warranty Period begins from the date of first purchase with original receipt, or, if no receipt is available, from Manufacturer's shipping date as stated on the battery.

WHAT WILL ENERSYS DO?

Batteries determined to meet the conditions of this warranty will be replaced free of charge if, at the sole discretion of Manufacturer, adjustment is necessary due to defect in material or workmanship.

Batteries replaced under the warranty provisions will be shipped with a yellow replacement warranty sticker and carry only the remainder of the original Applicable Warranty Period.

WHAT IS NOT COVERED BY THIS WARRANTY?

A. The warranty does not cover a Battery reaching its normal end of life which may occur prior to the warranty periods stated above. Depending on the application a Battery can reach its normal end of life before the end of the Applicable Warranty Period.

• A Battery can deliver only a fixed number of usable amp-hours over its lifetime and is considered to have reached its normal end of life if the application uses up all of these amp-hours, regardless of the time the Battery has been in service. Therefore Manufacturer reserves the right to deny a warranty claim if it determines the Battery to be at its normal end of life, even if the claim is lodged within the Applicable Warranty Period.

B. This warranty does not cover used, pre-owned and/or ODYSSEY battery products purchased through unauthorized Internet channels (for example: auction sites and unauthorized mass e-commerce sellers/resellers).

C. This warranty does not cover a Battery that is damaged or destroyed as a result of one or more of the following:

- Willful abuse, misuse, physical damage, neglect or if the top decorative cover has been removed.
- Natural forces such as wind, lightning, hail; damage due to fire, collision, explosion, vandalism, theft, penetration or opening of the Battery case in any manner.
- Overcharging, undercharging, charging or installing in reverse polarity, improper maintenance, allowing the Battery to be deeply discharged via a parasitic load or mishandling of the Battery such as but not limited to using the terminals for lifting or carrying the Battery. Trickle chargers that do not have a regulated trickle charge voltage between 13.5V and 13.8V (no lower than 13.5V and no higher than 13.8V) will cause early failure of the Battery. Use of such chargers with the Battery will also void the Battery's warranty. For applications where an alternator is present, the alternator must deliver between 14.0V and 14.7V when measured at the Battery's terminals. Consult the ODYSSEY battery technical manual or owner's manual for any necessary temperature compensation. Alternators that do not have a regulated charge between 14.0V and 14.7V (no lower than 14.0V and no higher than 14.7V) will cause early failure of the Battery. Use of such alternators with the Battery will also void the Battery's warranty.

• Failure to properly install the Battery or lack of metal jacket for high temperature or vibration applications.

• Repair or attempted repair of the Battery by anyone other than an authorized Manufacturer's representative shall void this warranty.

• Normal or accelerated deterioration in the electrical qualities due to operating or application conditions.

• If the Battery is used for an application that requires higher cranking power or a greater reserve rating than the Battery is designed to deliver, or the Battery capacity is less than the Battery capacity specified by the vehicle manufacturer, or the Battery is otherwise used in applications for which it was not designed.

• Prolonged storage of vehicles with fuel injection computers, alarms, GPS and other electrical devices that require continuous battery power to support active memories; this power drain must be offset with a maintenance-float charger, periodic charging or disconnecting the Battery to prevent irreversible damage. A Battery with an open circuit voltage (OCV) of equal to or less than 10.0V will be deemed as over discharged and void warranty due to misuse and/or neglect.

ODYSSEY® EXTREME SERIES™ BATTERY WARNING – DO NOT USE ANY TYPE OF OIL, ORGANIC SOLVENT, ALCOHOL, DETERGENT, STRONG ACIDS, STRONG ALKALIS, PETROLEUM-BASED SOLVENT OR AMMONIA SOLUTION TO CLEAN THE BATTERY COVERS AND BATTERY TOPS. THESE MATERIALS MAY CAUSE PERMANENT DAMAGE TO THE BATTERY COVERS AND BATTERY TOPS AND WILL VOID THE WARRANTY.

ODYSSEY® PERFORMANCE SERIES™ BATTERY WARNING – PROLONGED EXPOSURE AND OR IMMERSION INTO ANY TYPE OF OIL, ORGANIC SOLVENT, ALCOHOL, DETERGENT, STRONG ACIDS, STRONG ALKALIS, PETROLEUM-BASED SOLVENT OR AMMONIA SOLUTION TO CLEAN THE BATTERY COVERS AND BATTERY TOPS MAY CAUSE PERMANENT DAMAGE TO THE BATTERY COVERS AND BATTERY TOPS AND WILL VOID THE WARRANTY.

HOW TO OBTAIN WARRANTY SERVICE:

A. Retail, Dealer or Wholesaler Purchases: return the Battery to the original supplying wholesaler or dealer with original purchase receipt. If not feasible, other ODYSSEY battery distributors/dealers can be approached but a warranty processing fee may be applied.

B. Online Purchases: For new ODYSSEY products purchased through an approved online reseller, contact the original online reseller for warranty service. You may be responsible for shipping, and all associated costs, back to that online reseller. Please check the online reseller's policy before your purchase.

C. www.odysseybattery.com Purchases: contact Manufacturer at 800-964-2837. You will need to provide the order number, original date of purchase, serial number and date stamp from top of the battery. At the sole discretion of Manufacturer, you may be required to return the battery for further evaluation and may be subject to additional handling and shipping costs.

If the Battery is determined by Manufacturer, in its sole discretion, to be defective for material or workmanship under terms of this limited warranty, it will be replaced.

Manufacturer's acceptance of any items shipped to Manufacturer shall not be deemed an admission that the items so shipped are defective. Any items shipped back to Manufacturer, shall in Manufacturer's sole discretion, become Manufacturer's property.

WARRANTY LIMITATIONS:

TO THE EXTENT PERMITTED BY LAW, THIS LIMITED WARRANTY IS IN LIEU OF, AND MANUFACTURER DISCLAIMS AND EXCLUDES ALL OTHER WARRANTIES, STATUTORY, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. IN SO FAR AS SUCH WARRANTIES CANNOT BE LAWFULLY DISCLAIMED, MANUFACTURER LIMITS THE DURATION AND REMEDIES OF SUCH WARRANTIES TO THE DURATION AND REMEDIES OF THIS WARRANTY. MANUFACTURER'S EXCLUSIVE LIABILITY FOR BREACH OF WARRANTY SHALL BE TO REPLACE THE BATTERY WITHIN THE EFFECTIVE WARRANTY PERIOD. IN NO EVENT SHALL MANUFACTURER BE LIABLE FOR ANY LOSS OR DAMAGES OF ANY OTHER KIND, WHETHER DIRECT, INCIDENTAL, CONSEQUENTIAL, EXEMPLARY, SPECIAL OR OTHERWISE. NOR SHALL MANUFACTURER BE LIABLE FOR ANY REMOVAL OR INSTALLATION EXPENSE, OR THE LOSS OF TIME OR PROFITS.

Some countries and/or states do not allow limitation on how long an implied warranty lasts or the exclusion or limitation of incidental or consequential damages, so the above limitations may not apply to you. This warranty gives you specific legal rights, which may vary from country to country and/or state to state. This warranty shall be governed by and interpreted in accordance with the laws of the Commonwealth of Pennsylvania without regard to Pennsylvania conflicts of laws rules. The United Nations Convention on Contracts for the International Sale of Goods signed in Vienna in 1980 shall not apply to this warranty. This warranty is understood to be the exclusive agreement between the parties relating to the subject matter hereof. No employee or representative of Manufacturer is authorized to make any warranty in addition to those made in this agreement.

Keep your receipt. Receipt is required for longest Warranty Protection.

For your convenience, this space is provided for attaching your original receipt.

Always properly recycle your lead acid battery by returning to an authorized recycling center or automotive dealer.



NEVER PLACE USED BATTERIES IN THE BIN!

EnerSys World Headquarters

2366 Bernville Road
Reading, PA 19605
Tel: +1-610-208-1991
+1-800-538-3627

EnerSys EMEA

EH Europe GmbH
Löwenstrasse 32
Zürich, Switzerland
Tel: +41 (0) 44 215 74 10

EnerSys Asia

152 Beach Road
Gateway East Building #11-03
Singapore 189721
Tel: +65 6508 1780

www.odysseybattery.com

© 2014 EnerSys. All rights reserved.
Trademarks and logos are the property of EnerSys and its affiliates, except General Motors®, which is not the property of EnerSys. Subject to revisions without prior notice. E.&O.E.

